


R128K MULTISTAGE SUBMERSIBLE PUMP

Performance Table

Type Single Phase 220 - 240V	Motor		Single Phase 200 - 240V			Q	Flowrate							
						m ³ /h	0	1.8	2.4	3	3.6	4.2	4.8	5.4
	HP	kW	A	μF	V _{AC}	Head in Meters	Total Head in Meters							
R128K - 5	1.3	1.0	6.5	25	450	65	61	58	54	50	45	39	33	26
R128K - 6	1.6	1.2	7.4	30	450	80	73	69	65	60	54	47	40	31

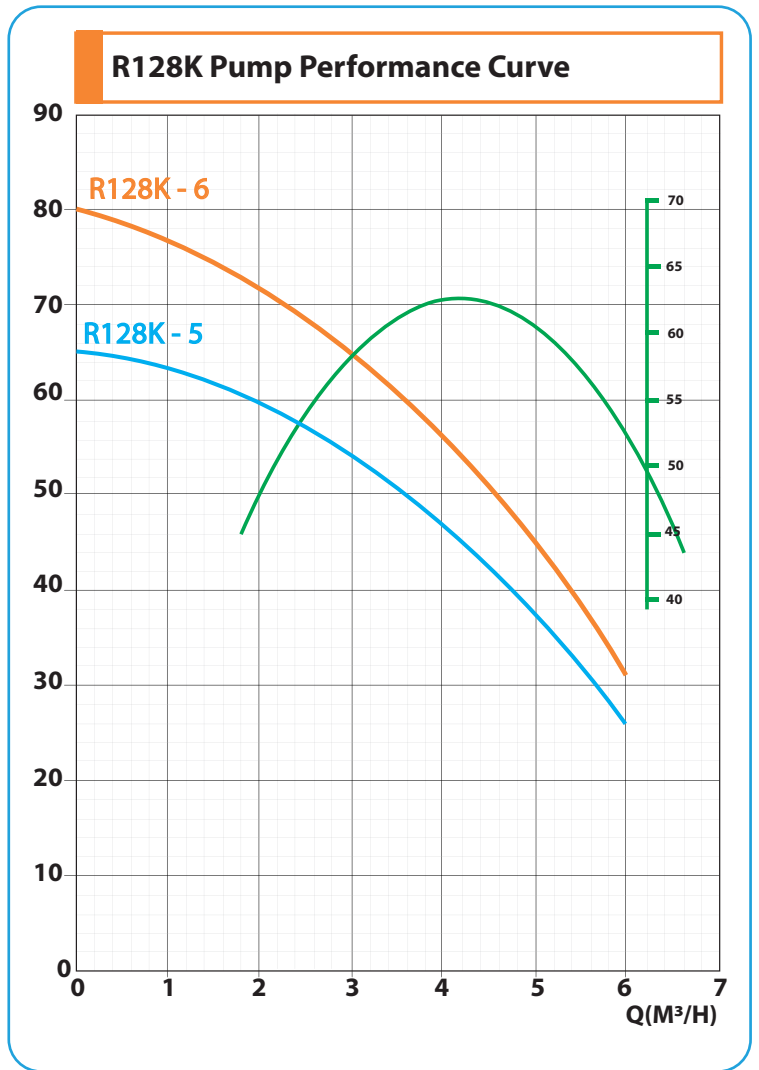

Features

- High quality mechanical seal
- Integral thermal protection
- Stainless Steel Impeller
- 15m Extended Cable
- High efficiency
- Prolonged Service Life
- Bottom Suction
- Effective Motor Cooling
- In-built Capacitor

