

## R148 MULTISTAGE SUBMERSIBLE PUMP

Performance Table


Type Single Phase 220V	Type Three Phase 380	Current A		Input kW		Motor		Capacitor	Flowrate in m <sup>3</sup> /h								
		1~	3~	1~	3~	kW	HP	μF	0	1	2	3	5	7	9	11	13
		220V	400V						Total Head in Meters								
R148 - 4M	R148 - 4T	8.8	3	1.9	1.8	1.1	1.5	30	55	53	51	49	43	36	27.5	18	7
R148 - 6M	R148 - 6T	13	5		2.8	2.2	3	50	85	84	82	79	72	62.5	50	37	21



Outlet Size  
1 1/2"



R128K Pump Performance Curve

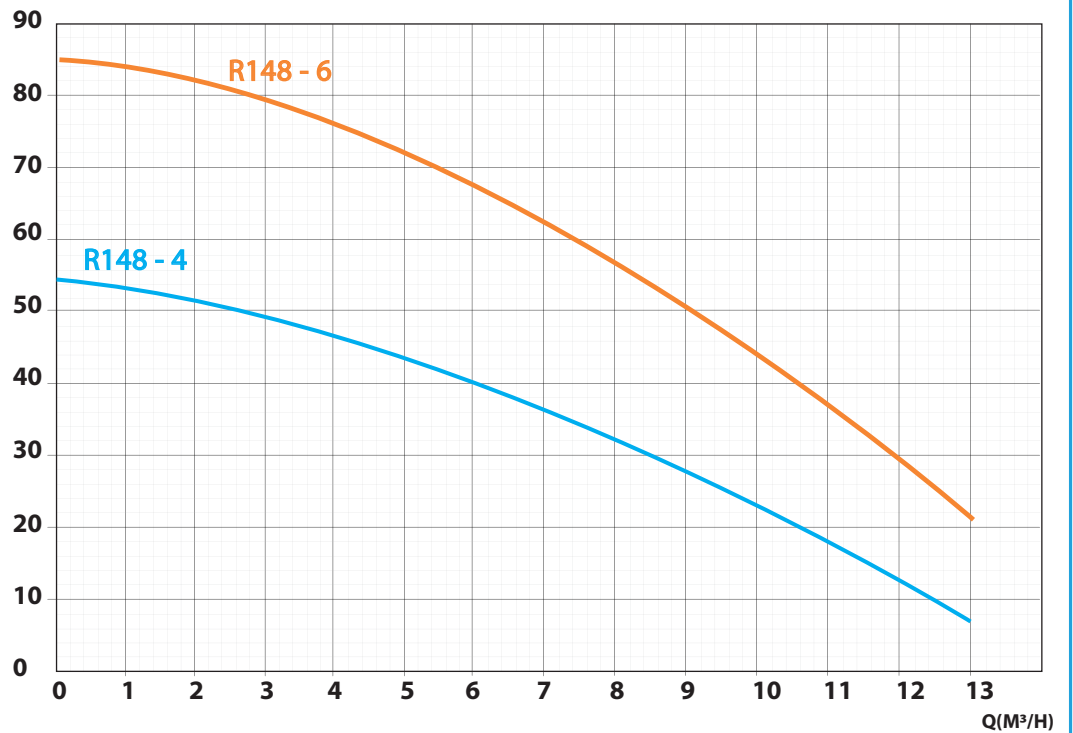

### Features

- High quality mechanical seal
- Integral thermal protection
- Stainless Steel Impeller
- 15m Extended Cable
- High efficiency
- Prolonged Service Life
- Bottom Suction
- Effective Motor Cooling
- External Capacitor
- No float switch for dry run protection